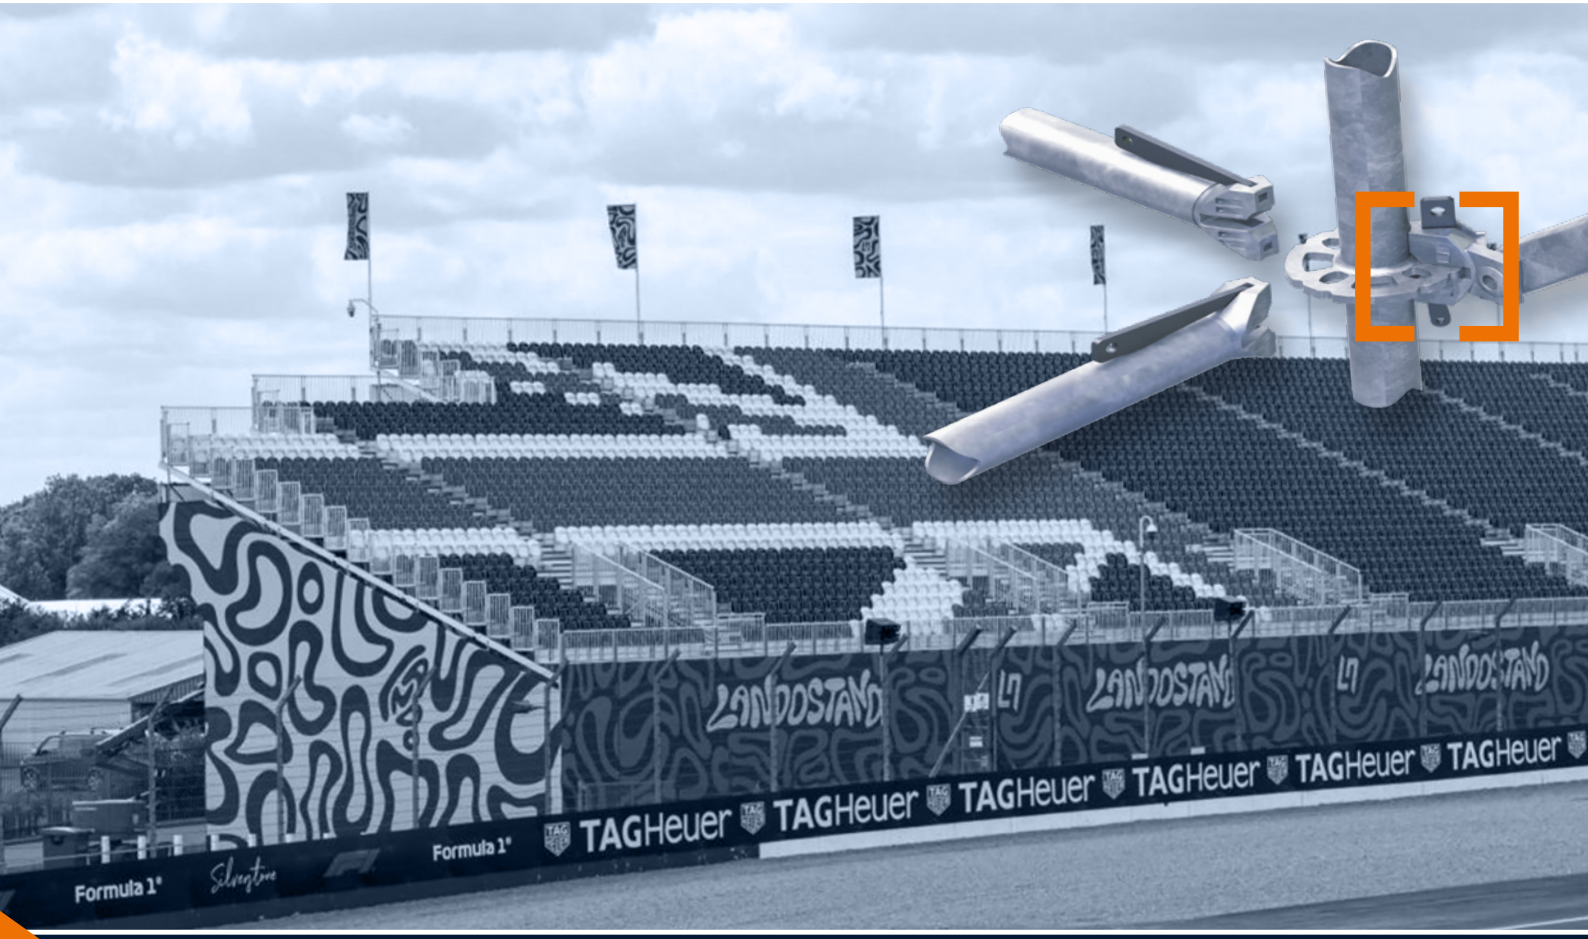


Photo: GL events UK

RINGSCAFF
SILVERSTONE CIRCUIT
UNITED KINGDOM

ABOUT
GL EVENTS UK

GL events UK is a leading provider of seating, stadia, and event infrastructure solutions, supporting major sporting, entertainment, and cultural events across the UK and internationally.

As part of the global GL events Group, the company combines expertise in event infrastructure, seating solutions, and large-scale venue projects. Its experience ranges from temporary event installations to permanent spectator facilities, with a focus on delivering practical and tailored solutions for complex venues.

More information:
www.glevents.co.uk

PROJECT
QUICK FACTS

- **Project:** New Landostand at Silverstone Circuit, United Kingdom
- **Project duration:** October 2025 – 2026
- **Challenge:** Complex curved grandstand structure requiring bespoke scaffolding components and precise material coordination
- **Scaffolding solution:** 300 tonnes of RINGSCAFF material

scafom·rux



SCAFFOLDING CHALLENGE
A PERMANENT GRANDSTAND FOR ONE OF MOTORSPORT'S MOST ICONIC CIRCUITS

At Stowe Corner, Formula 1 drivers brake from well over 186 mph before turning into one of Silverstone's fastest right-hand turns. Approached from the Hangar Straight, it is a place where every split second matters, making it a favourite viewing point for spectators. From the 2026 British Grand Prix onwards, more than 16,000 spectators can experience that action from the new Landostand: a permanent grandstand that has become one of the circuit's most striking new features.

Behind the spectator seating, RINGSCAFF provides the structural substructure supporting the grandstand. The scale of the project, combined with the stand's curved layout and detailed geometry, meant that the scaffolding solution required more than a standard modular material package.

That's why, long before the first standards and ledgers arrived at Silverstone, planning was already well underway. Scafom-rux began working with GL events UK in October 2025, helping to prepare for the project months ahead of the first deliveries to site in February 2026.

SCAFFOLDING SOLUTION
MORE THAN A STANDARD SCAFFOLD PACKAGE

The Landostand required around 300 tonnes of RINGSCAFF material—approximately 40,000 individual components—to create its supporting structure.

Not every component came straight from the catalogue. The stand's design called for a substantial number of bespoke parts, manufactured specifically for the project. To help keep installation moving, Scafom-rux also supplied colour-coded components to make it easier for installation teams to identify specialist parts quickly during assembly. The result was a supply package tailored to the demands of one of the largest grandstand projects undertaken at Silverstone in recent years.

Construction started in early March 2026. Over the following weeks, teams of between 10 and 16 installers assembled the structure while deliveries continued in line with the build programme to ensure that materials arrived when and where they were needed.

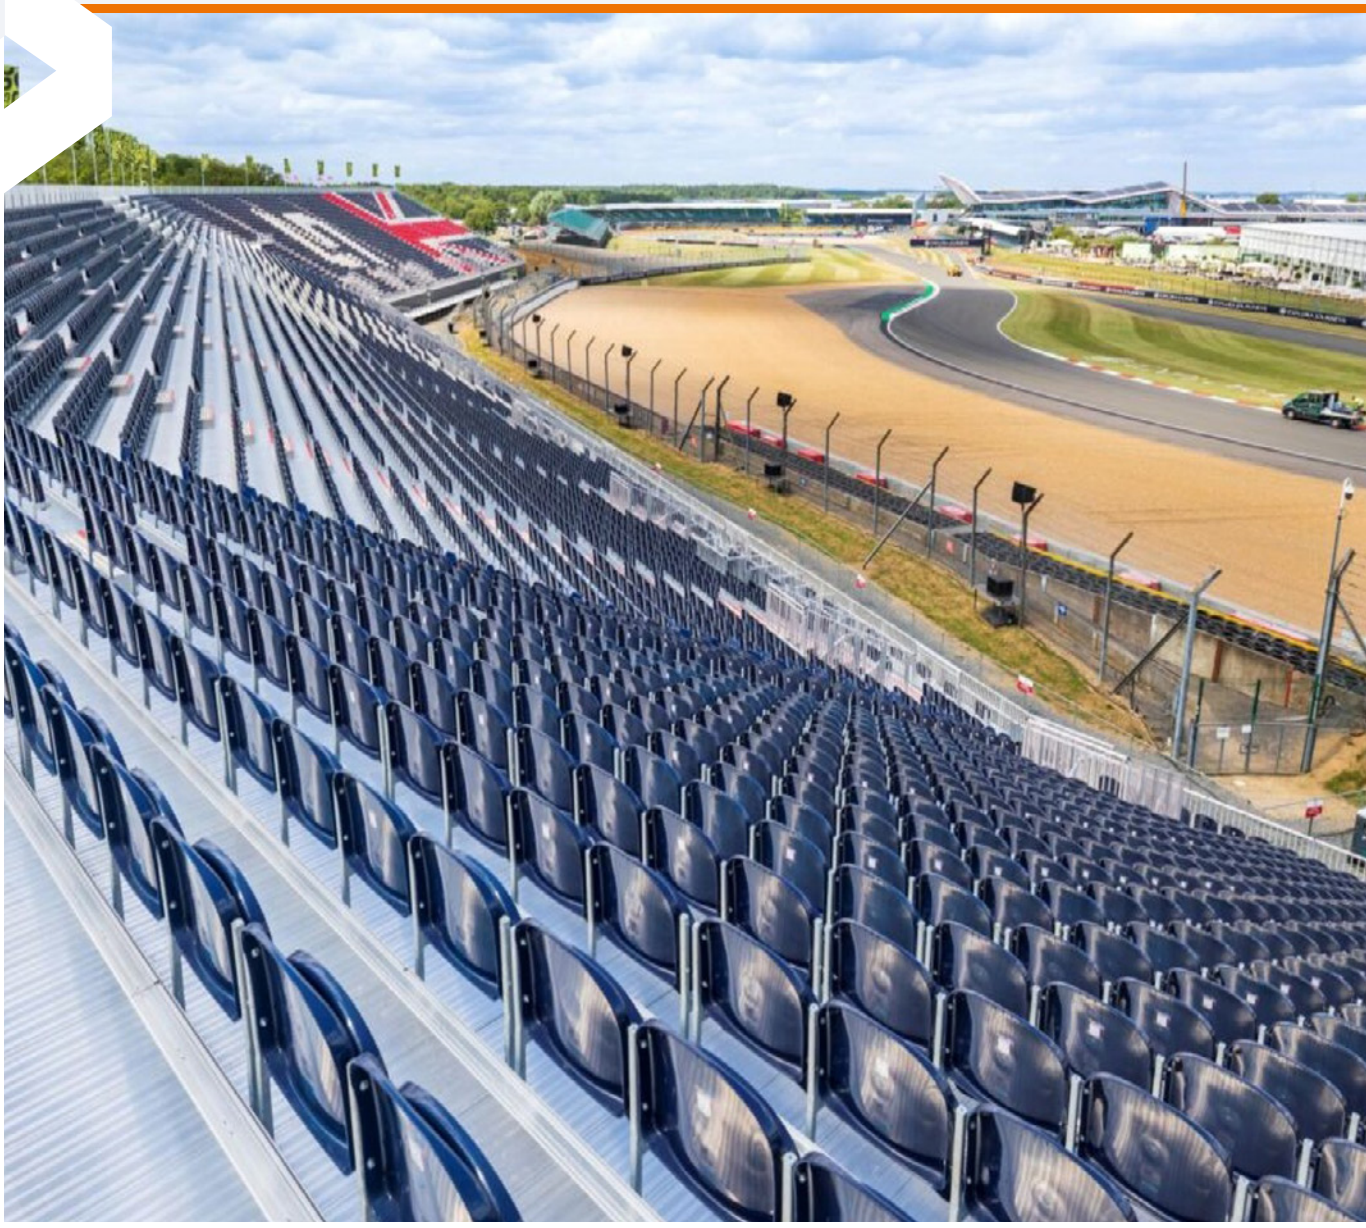


Photo: GL events UK



RESULT & OUTLOOK
GRANDSTAND BUILT TO STAY

Even before the British Grand Prix weekend, the scale of the new grandstand was attracting attention around the circuit. Chris Mansell, Managing Director of Seating and Stadia at GL events UK, said: *"Seeing people drive past the circuit, stop, and get out of their car to take a photo of the stand is always an incredibly proud moment. I'm also very proud of the team for pulling together and managing such a large project with minimal impact on day-to-day business operations – it's amazing to be a part of something so iconic."*

Unlike many event structures erected for a single race weekend, the Landostand has been designed as a permanent addition to Silverstone, with the option to expand capacity in the future.






RINGSCAFF FACTS

RINGSCAFF is one of the most widely recognised modular scaffolding systems worldwide. Known for its versatility, stability, and efficient assembly, RINGSCAFF provides a flexible solution for applications ranging from standard access scaffolding to demanding temporary and permanent structures.

- **Quick and easy assembly** thanks to the proven Ring Lock connection system
- **High load capacity** for demanding structural and access applications
- **Flexible configuration** for complex geometries and individual project requirements
- **Multi-purpose use** as scaffolding, stair tower and/or shoring system
- **Efficient handling** with easy stacking and fewer loose parts
- **Suitable for** temporary and permanent structures

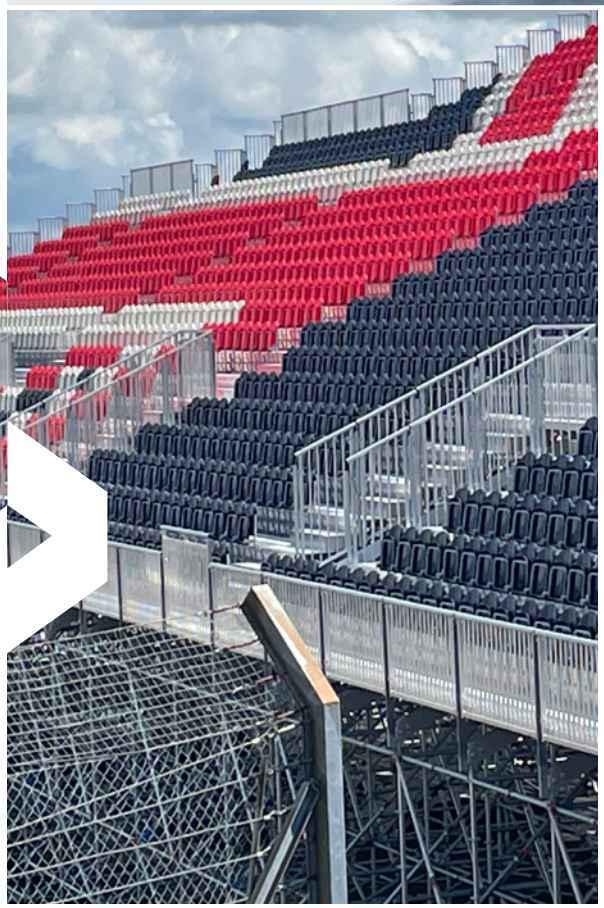

ABOUT SCAFOM-RUX

Scafom-rux is a global manufacturer, distributor, and rental provider of high-quality scaffolding and shoring systems. Our dedicated team understands the unique demands of professionals across industries such as construction, events, oil & gas, mining, and shipbuilding.

By combining industry insight with technical expertise, we help customers find the best solution for even the most complex scaffolding projects worldwide.

Planning a challenging project?

We're here to support you:

@ UKenquiries@scafom-rux.com

+44 (0) 113 898 0104

For more information about our full product range and services, visit: **www.scafom-rux.uk**

STRONGER. **TOGETHER.**



Photo: GL events UK

Watch the project video here!

Scafom-rux UK
30B Knowsthorpe Way,
Cross Green Industrial Estate,
Leeds, LS9 0SW
United Kingdom

T. +44 (0) 113 898 0104
UKenquiries@scafom-rux.com
www.scafom-rux.uk

scafom-rux